



## HF-Performer III

### Electronic ballasts for TL-D lamps

#### Product Description

- Sustainable, energy efficient, high frequency electronic ballast for TL-D fluorescent lamps

#### Product Features and Benefits

- Energy efficient CELMA A2
- ENEC & CE approval, complying to all relevant international safety and performance standards
- Robust design for 50.000 hour lifetime at  $T_{C_{max}}$  and over 60.000 on/off switches on one lamp
- Programmed, flicker-free, preheated start (< 1.6 s) enabling the lamp to be switched on/off without reducing lamp lifetime (e.g. for use in combination with lighting control components)
- High power factor 0.99 with THD < 10%
- Automatic restart after voltage dip or lamp exchange
- Suitable for emergency DC operation of 186V to 275V (at -10°C), in line with IEC/EN 60598-2-22

- High frequency operation; eliminating eye strain as caused by electromagnetic ballasts
- EMC compliant to EN 55015 2006 + A1 2007
- Unit is protected against excessive mains voltage and incorrect connections
- Active power factor correction for constant light levels independent of mains voltage fluctuations
- Universal connector designed for horizontal manual and push-in robot wiring and vertical ALF-robot wiring

#### Applications

Ideal for applications with high energy efficiency is desired:

- Used with movement detection control systems like the Philips OccuPlus
- In office buildings, hospitals, supermarkets, department stores, schools
- In class I outdoor applications e.g. industrial premises and car parks
- In emergency lighting applications

# PHILIPS

sense and simplicity

## Quality


We ensure optimum quality regarding:

- Product safety: Ballast is protected against excessive mains voltage, incorrect connections and a safety stop is automatically activated in case of lamp failure.
- System supplier: As a manufacturer of both lamps and electronic ballast, Philips ensures that optimum lamp/ballast performance is maintained from the earliest development stage.
- International standards: Our ballast complies with all relevant international rules and regulations related to safety, performance, energy efficiency, immunity, hazardous substances and EMC.

Details can be found in the compliance and approval section.

## Compliances and approvals

- RFI 9kHz-30 MHz EN 55015
- RFI 30 MHz-300 MHz EN 55015: 2006+A1:2007
- RFI when operated on DC EN 55015: 2006+A1:2007
- RFI > 30 MHz EN 55022 B
- Harmonics EN 61000-3-2
- Immunity EN 61547
- Safety EN 61347-2-3
- Safety when operated on DC EN 61347-2-3 Annex J
- Performance EN 60929
- Vibration & bump tests IEC 68-2-6 Fc  
IEC 68-2-29 Eb
- Quality standard ISO 9000-2000
- Environmental standard ISO 14001
- CELMA Energy classification EEI = A2
- Approval marks ENEC, VDE-EMC, C-tick, TISI
- CE marking
- Temperature declared thermally protected IEC 61347-1 

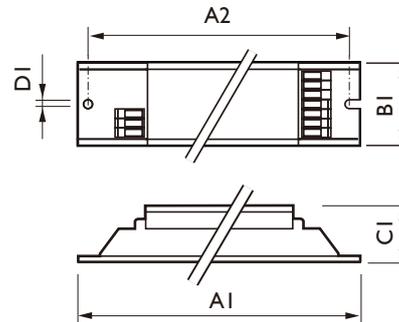

## Dimensions in mm (nom)

| Type               | A1    | A2    | B1   | C1   | D1  |
|--------------------|-------|-------|------|------|-----|
| HF-P III 1 Lamp    | 280.0 | 265.0 | 30.0 | 28.0 | 4.2 |
| HF-P III 2 Lamps   | 280.0 | 265.0 | 30.0 | 28.0 | 4.2 |
| HF-P III 3/4 Lamps | 280.0 | 265.0 | 39.0 | 28.0 | 4.2 |

## Electrical data

| Ballast                      | Qty of Lamps | Energy Efficiency Index CELMA | Line Frequency (Hz) | Line Voltage (V) |
|------------------------------|--------------|-------------------------------|---------------------|------------------|
| HF-P 118 TL-D III 220-240V   | 1            | A2                            | 50/60               | 220-240          |
| HF-P 218 TL-D III 220-240V   | 2            | A2                            | 50/60               | 220-240          |
| HF-P 3/418 TL-D III 220-240V | 3            | A2                            | 50/60               | 220-240          |
| HF-P 3/418 TL-D III 220-240V | 4            | A2                            | 50/60               | 220-240          |
| HF-P 136 TL-D III 220-240V   | 2            | A2                            | 50/60               | 220-240          |
| HF-P 236 TL-D III 220-240V   | 1            | A2                            | 50/60               | 220-240          |
| HF-P 336 TL-D III 220-240V   | 3            | A2                            | 50/60               | 220-240          |
| HF-P 158 TL-D III 220-240V   | 1            | A2                            | 50/60               | 220-240          |
| HF-P 258 TL-D III 220-240V   | 2            | A2                            | 50/60               | 220-240          |

### Technical data: (all typical values at Vmains = 230V)

| Lamps    | Qty of Lamps | Ballast                      | System Power (W) | Lamp Power (W) | Ballast Losses (W) | Nominal Lamp (Lm) |
|----------|--------------|------------------------------|------------------|----------------|--------------------|-------------------|
| TL-D 18W | 1            | HF-P 118 TL-D III 220-240V   | 18.5             | 1 × 16.0       | 2.5                | 1350              |
| TL-D 18W | 2            | HF-P 218 TL-D III 220-240V   | 35.5             | 2 × 16.0       | 3.5                | 1350              |
| TL-D 18W | 3            | HF-P 3/418 TL-D III 220-240V | 52.5             | 3 × 16.0       | 4.5                | 1350              |
| TL-D 18W | 4            | HF-P 3/418 TL-D III 220-240V | 69.5             | 4 × 16.0       | 5.5                | 1350              |
| TL-D 36W | 1            | HF-P 136 TL-D III 220-240V   | 35.0             | 1 × 32.0       | 3.0                | 3350              |
| TL-D 36W | 2            | HF-P 236 TL-D III 220-240V   | 70.0             | 2 × 32.0       | 6.0                | 3350              |
| TL-D 36W | 3            | HF-P 336 TL-D III 220-240V   | 104.0            | 3 × 32.0       | 8.0                | 3350              |
| TL-D 58W | 1            | HF-P 158 TL-D III 220-240V   | 54.5             | 1 × 50.0       | 4.5                | 5200              |
| TL-D 58W | 2            | HF-P 258 TL-D III 220-240V   | 106.0            | 2 × 50.0       | 6.0                | 5200              |

### Mains current

| Lamps    | Qty of Lamps | Ballast                      | Input current During operation (A) |
|----------|--------------|------------------------------|------------------------------------|
| TL-D 18W | 1            | HF-P 118 TL-D III 220-240V   | 0.090                              |
| TL-D 18W | 2            | HF-P 218 TL-D III 220-240V   | 0.190                              |
| TL-D 18W | 3            | HF-P 3/418 TL-D III 220-240V | 0.250                              |
| TL-D 18W | 4            | HF-P 3/418 TL-D III 220-240V | 0.330                              |
| TL-D 36W | 1            | HF-P 136 TL-D III 220-240V   | 0.160                              |
| TL-D 36W | 2            | HF-P 236 TL-D III 220-240V   | 0.310                              |
| TL-D 36W | 3            | HF-P 336 TL-D III 220-240V   | 0.460                              |
| TL-D 58W | 1            | HF-P 158 TL-D III 220-240V   | 0.240                              |
| TL-D 58W | 2            | HF-P 258 TL-D III 220-240V   | 0.480                              |

## Inrush current

| Ballast                      | Maximum Ballast Number on MCB Type B 16A | Inrush Current Peak (A) | Inrush Current Width (ms) |
|------------------------------|--|-------------------------|---------------------------|
| HF-P 118 TL-D III 220-240V   | 28                                       | 18                      | 250                       |
| HF-P 218 TL-D III 220-240V   | 28                                       | 18                      | 250                       |
| HF-P 3/418 TL-D III 220-240V | 12                                       | 31                      | 350                       |
| HF-P 3/418 TL-D III 220-240V | 12                                       | 31                      | 350                       |
| HF-P 136 TL-D III 220-240V   | 28                                       | 18                      | 250                       |
| HF-P 236 TL-D III 220-240V   | 28                                       | 18                      | 250                       |
| HF-P 336 TL-D III 220-240V   | 12                                       | 31                      | 350                       |
| HF-P 158 TL-D III 220-240V   | 28                                       | 18                      | 250                       |
| HF-P 258 TL-D III 220-240V   | 12                                       | 31                      | 350                       |

## Conversion table for max. quantities of ballasts on other types of Miniature Circuit Breaker

| MCB type | Rating | Relative number of ballasts |
|----------|--------|-----------------------------|
| B        | 16 A   | 100% (see table above)      |
| B        | 10 A   | 63%                         |
| C        | 16 A   | 170%                        |
| C        | 10 A   | 104%                        |
| L, I     | 16 A   | 108%                        |
| L, I     | 10 A   | 65%                         |
| G, U, II | 16 A   | 212%                        |
| G, U, II | 10 A   | 127%                        |
| K, III   | 16 A   | 254%                        |
| K, III   | 10 A   | 154%                        |

## Technical data for installation

### Mains operation

|  |           |
|--|-----------|
| Rated mains voltage                      | 220-240 V |
| With tolerances for performance +6%, -8% | 202-254 V |
| With tolerances for safety +/- 10%       | 198-264 V |
| Mains frequency                          | 50/60 Hz  |

|   |  |
|---|--|
| Operation frequency (typical)                           | > 42 kHz (45 kHz)  |
| Power factor  | 0.99   |
| Earth leakage current                                   | < 0,5 mA per ballast   |
| Ignition time   | 1.0 sec  |
| Constant light operation                                | In case of mains voltage fluctuations within 202-254 V, the luminous flux changes by a maximum of $\pm 2\%$    |
| Overvoltage protection                                  | 48 hrs at 320 V AC,<br>2 hrs at 350 V AC   |
| Dual fixture operation                                  | Master-slave operation, not advised  |
| Cable capacity  |  |
| For 1 / 2 / 3 / 4 Lamps                                 | Max. 200 pF between lamp wires<br>Max. 200 pF between lamp wires and Earth<br>EMI precautions have to be taken |
| Automatic restart after lamp replacement or voltage dip | Yes; tested with a dip down to 30% with a duration of 10 mains cycle   |
| Insulation resistance test                              | 500 V DC from both mains inputs to Earth (not between Line and Neutral)  |

## DC/Emergency operation

DC voltage operation (during emergency back-up)

Required battery voltage for  
guaranteed ignition 198 - 254 V

Required battery voltage for  
burning lamps 176 - 254 V

Nominal light output is obtained at  
the DC voltage of 220 - 240 V

### Notes:

1. For a continuous DC application, an external fuse should be used in the luminaire.
2. Continuous low DC voltages (<198 V) can influence the lifetime of the ballast.

## Mechanical installation notes

### Technical data for design and mounting HF ballasts in fixtures

#### Temperatures

Temperature range to ignite lamp with  
ignition aid -25°C to +50°C  
Max. T<sub>case</sub> 75°C


Lifetime of a ballast depends on the temperature of the ballast. This means there is a relation between the T<sub>c</sub> point on the ballast and its lifetime. The HF-Performer intelligent ballast has a specified lifetime of 50.000 hrs, with a maximum of 10% failures guaranteed, at a measured T<sub>case</sub> of 75°C. For more information regarding this subject consult the Philips Application guide to fluorescent lamp control gear.

Hum and noise level inaudible


Permitted humidity is tested according to EN61347-1 par. 11.  
Note that no moisture or condensation may enter the ballast.

The ballasts is thermally protected at 110 deg C acc to EN61347-1 annex C.


#### TL-D 1 Lamp

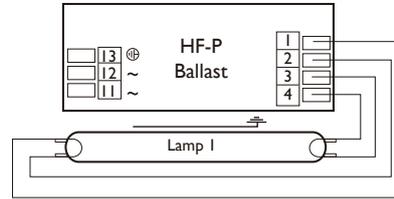


#### TL-D 2 Lamps

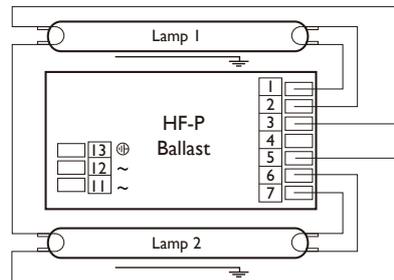

#### TL-D 3 Lamps

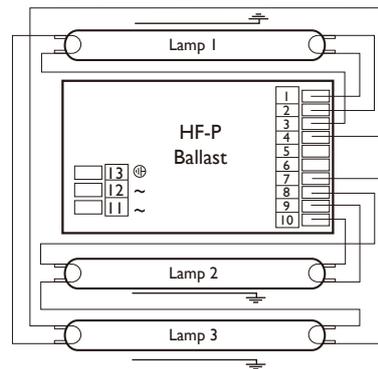

#### TL-D 4 Lamps

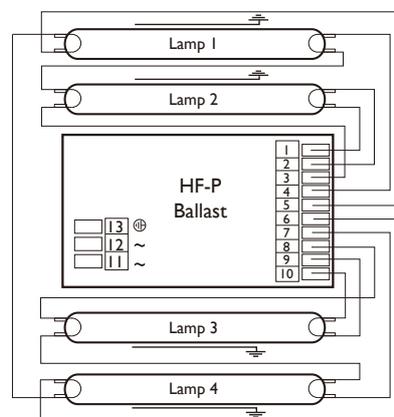

### Connector types:

Connection wiring is greatly simplified through use of WAGO universal connector suitable for both automatic wiring (ALF and ADS) and manual wiring. Earth connection can be made via the earth terminal on the mains side.

### Wire lengths:

For optimal performance (Ignition and EMI), it is advised that following wires need to be kept short (<15 cm)

- For one lamp circuits keep wires to terminals 3 and 4 short.
- For two lamp circuits keep wires to terminals 1, 2, 6 and 7 short.
- For three/four lamp circuits keep wire to terminal 1, 2, 9, and 10 short

### Wire cross-section:

|                   |  |
|-------------------|--|
| Lower connector   |  |
| On the mains side | 0.5...1.0 mm <sup>2</sup>  |
| On the lamp side  | 0.5...1.0 mm <sup>2</sup>  |
| Upper connector   |  |
| On the mains side | 0.5 mm <sup>2</sup> solid wire<br>0.75 mm <sup>2</sup> stranded wire |
| On the lamp side  | 0.5 mm <sup>2</sup> solid wire<br>0.75 mm <sup>2</sup> stranded wire |
| Strip length      | 8-9 mm   |

### Notes:

1. Data is based on a mains supply with an impedance of 400 mΩ (equal to 15 m cable of 2.5 mm<sup>2</sup> and other 20 m to the middle of the power distribution), under worst case conditions. With an impedance of 800 mΩ the number of ballasts can be increased by 10%.
2. Ensure that the neutral is reconnected again after above mentioned test is carried out and before the installation is put into operation.
3. Lamp wiring; the use of 500V rated components and wiring are required with HF-Performer Intelligent.
4. In some cases the maximum number of ballasts is not determined by the MCB but by the maximum electrical load of the installation.
5. Note that the maximum number of ballasts is given when these are all switched on at the same moment, i.e. by a wall switch.
6. Measurements were carried out on single-pole MCB's. For multi-pole MCB's it is advisable to reduce the number of ballasts by 20%.
7. It is advised to connect the mechanical luminaire parts such as mirror and / or louvre to earth potential, this to ensure best ignition and EMC performance.
8. Measurements will be verified in real installations; therefore data are subject to change.

### Ordering and packing data

| Ballast                      | Weight | Qty bulk       | Dimensions         | GPC          | EOC      |
|------------------------------|--------|----------------|--------------------|--------------|----------|
|                              | kg     | packing<br>pcs | bulk packing<br>cm |              |          |
| HF-P 118 TL-D III 220-240V   | 0.200  | 12             | 32.8 x 20.6 x 8.7  | 913713031266 | 91158900 |
| HF-P 218 TL-D III 220-240V   | 0.200  | 12             | 32.8 x 20.6 x 8.7  | 913713031366 | 91160200 |
| HF-P 3/418 TL-D III 220-240V | 0.250  | 10             | 32.8 x 22.1 x 8.7  | 913713031466 | 91162600 |
| HF-P 136 TL-D III 220-240V   | 0.200  | 12             | 32.8 x 20.6 x 8.7  | 913713031566 | 91164000 |
| HF-P 236 TL-D III 220-240V   | 0.200  | 12             | 32.8 x 20.6 x 8.7  | 913713031666 | 91166400 |
| HF-P 336 TL-D III 220-240V   | 0.265  | 10             | 32.8 x 22.1 x 8.7  | 913713031766 | 91168800 |
| HF-P 158 TL-D III 220-240V   | 0.200  | 12             | 32.8 x 20.6 x 8.7  | 913713031866 | 91170100 |
| HF-P 258 TL-D III 220-240V   | 0.235  | 12             | 32.8 x 20.6 x 8.7  | 913713031966 | 91172500 |



© 2010 Philips Lighting

All rights reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use. Publication thereof does not convey nor imply any license under patent or other industrial or intellectual property rights.

03/2010  
[www.philips.com](http://www.philips.com)